

Anthracite is a select coal, mined and processed for use in water filtration. It is ideal for single bed, dual bed or multi-media filtration systems.

Anthracite

ADVANTAGES

- Higher service flows and longer filter runs than equivalent sand filters
- Close attention to gradation, hardness and purity assures consistent and reliable performance
- Unique density allows Anthracite to be combined with other filtration media in multi-media filters
- Lower uniformity coefficient has less oversized and undersized particles resulting in a highly uniform bed

PHYSICAL PROPERTIES

- Color: Black
- Bulk Density: 50 lbs./cu. ft.
- Hardness: 3.0-3.8 (Mohs scale)
- Effective Size:
 - #1 Anthracite: 0.6-0.8 mm
 - #1½ Anthracite: 0.85-0.95 mm
 - #2 Anthracite: 1.7-2.0 mm
- Uniformity Coefficient:
 - #1 Anthracite: <1.7
 - #1½ Anthracite: <1.7
 - #2 Anthracite: <1.6
- Mesh Size:
 - #1 Anthracite: 14x30
 - #1½ Anthracite: 10x20
 - #2 Anthracite: 4x12
- Acid Solubility: ≤1%
- Caustic Solubility: <1%
- Apparent Specific Gravity: 1.6 gm/cc
- Meets AWWA Standard B100-01

CONDITIONS FOR OPERATION

- Bed depth: 24-36 in., 10-18 in multi-bed filters
- Freeboard: 50% of bed depth (min.)
- Service flow rate: 5 gpm/sq. ft. or higher depending upon local conditions
- Backwash flow rate:
 - #1 Anthracite: 12-18 gpm/sq. ft.
 - #1½ Anthracite: 18-25 gpm/sq. ft.
 - #2 Anthracite: use air scour
- Backwash bed expansion: 20-40% of bed depth


Although its potential for water treatment has been recognized since ancient times, anthracite coal was not used for this purpose until the beginning of the 20th century. Crushed Anthracite makes an excellent medium density filtration media. Anthracite is mined from the finest Pennsylvania coal. It is specifically selected for water treatment, and during its production goes through several sizing inspections. Representative samples are randomly chosen for a complete laboratory quality control analysis for effective size, uniformity coefficient, specific gravity, acid solubility and hardness.

Because of its angular shape, some of the sediment penetrates deeper into the bed. When compared to equivalent filter sands, this means longer filter runs and less head loss. Backwash rates are also reduced.

Because of its unique density, Anthracite can be used in multi-media filters. At 50 lbs/ft³, it will hydraulically classify and remain above heavier media such as Filter Sand or Manganese Greensand, providing a prefiltration layer.



Service Flow Pressure Drop

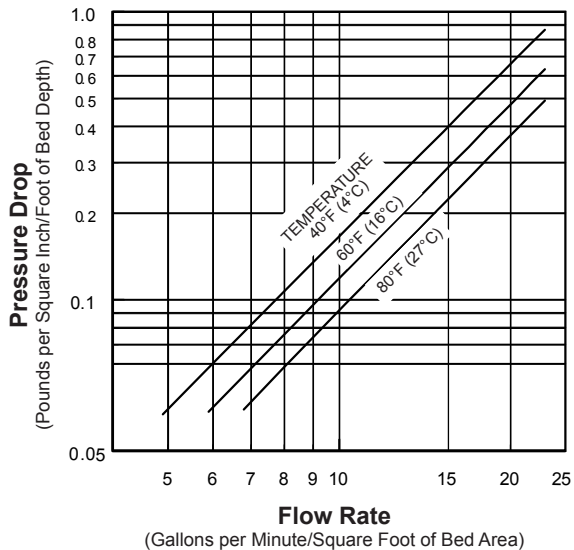

Backwash Bed Expansion

